


Delivery Programme

Electrical Insulation

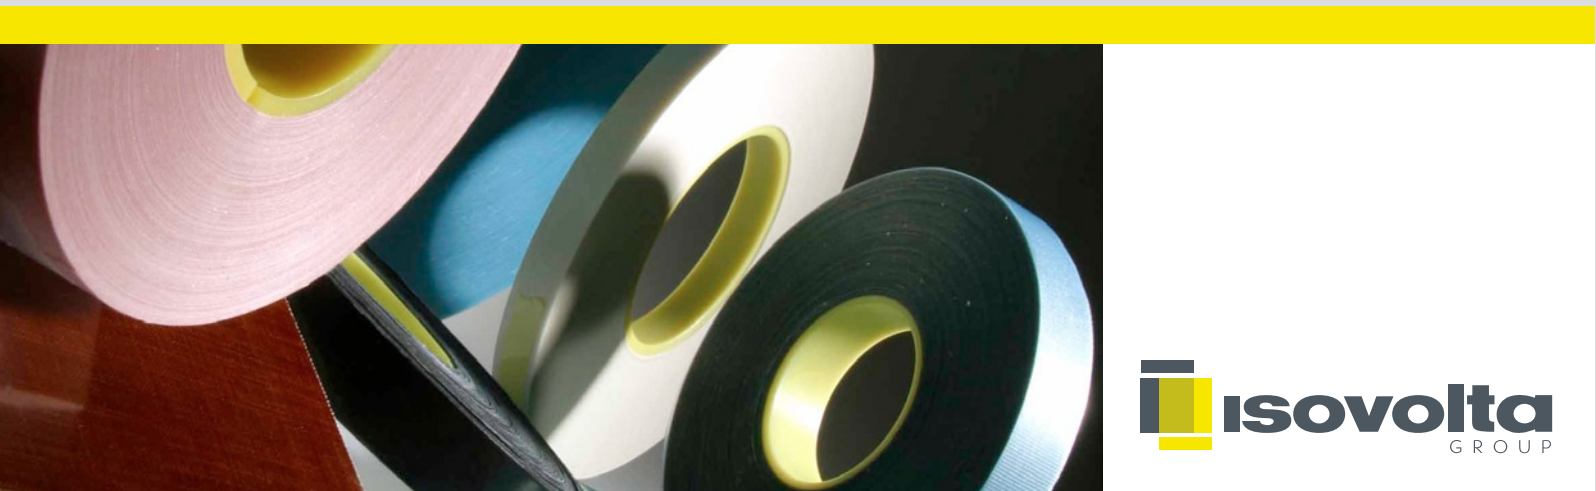

Content

High Voltage


Single Conductor and Cable Insulation	04
Preconsolidation and Auxiliary Materials	04
VPI Technology	05
Resin Rich Technology	06
Conductive Materials	07
Low to Medium Voltage Slot and End Winding Insulation	07
Traction Motors	07

Low Voltage & Transformer

Flexible Insulation Materials	10
Nomex®	14
Kapton®	14
Varnished Fabrics	14
Prepregs	15
CAT-Film®	16
ISOAD Tapes	16
Silicone Coated Materials	17
Resins and Varnishes	17

Prepregs & Laminates - Industrial

Paper and Cotton Fabric based Laminates	20
Glass Fibre based Laminates	21
Tubes and Rods	23

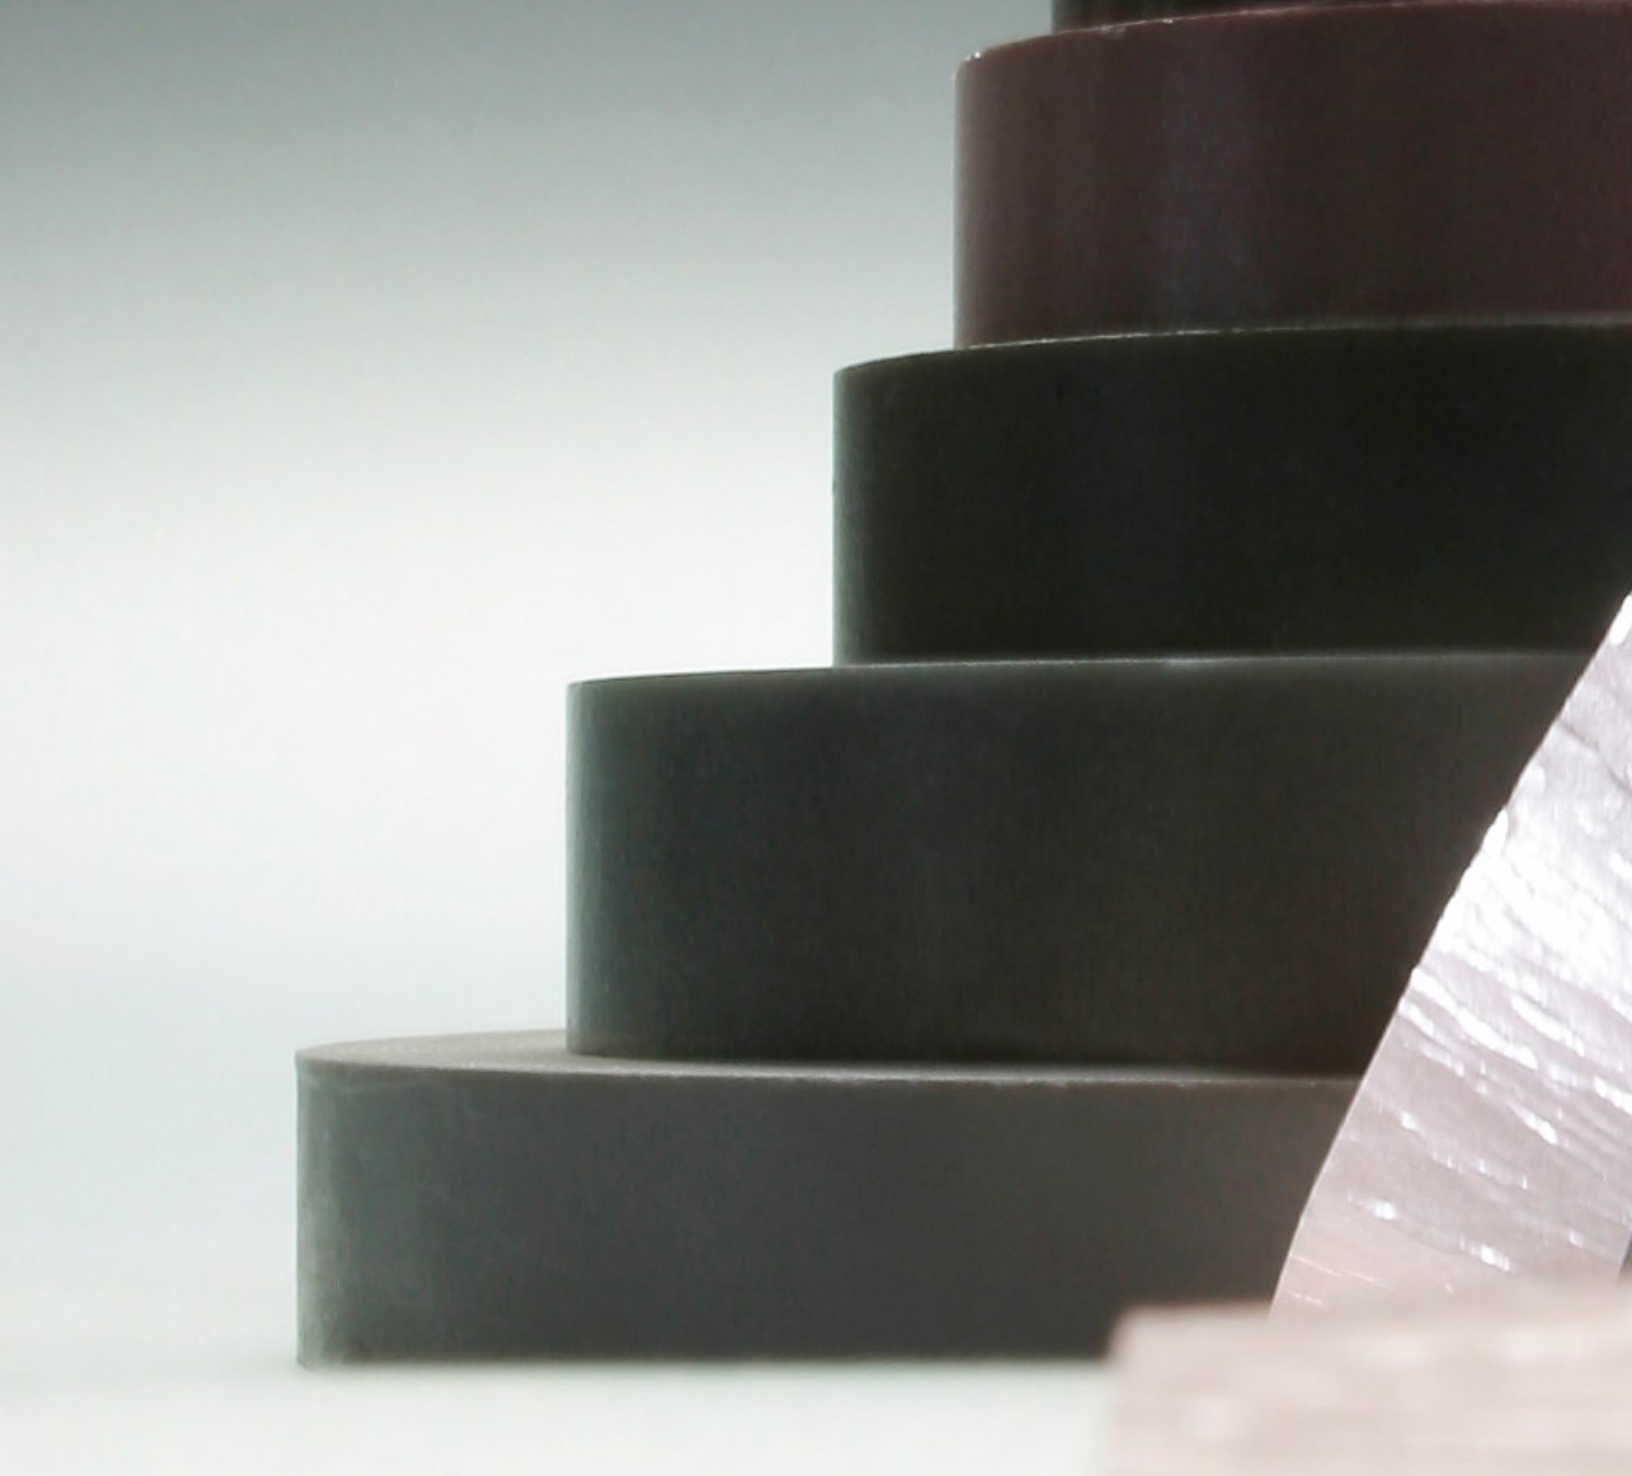



High Voltage

Single Conductor and Cable Insulation
Preconsolidation and Auxiliary Materials
VPI Technology
Resin Rich Technology
Conductive Materials
Low to Medium Voltage Slot and End Winding Insulation
Traction Motors

Single Conductor and Cable Insulation

CONDUCTOFOL®

Flexible calcined mica paper tapes with modified epoxy resin (Type K 2011 with silicone resin) on a PET or polyimide film carrier, for single conductor insulation in medium and high-voltage machines

CONDUCTOFOL® 2009	Standard type with PET film. Thermal class F (155 °C)
CONDUCTOFOL® 0264	As 2009, but coated with a special melting adhesive. Thermal class F (155 °C)
CONDUCTOFOL® 2371	With PET film on both sides. Thermal class F (155 °C)
CONDUCTOFOL® 2159	As 2371, additionally coated with a special melting adhesive on one side. Thermal class F (155 °C)
CONDUCTOFOL® 4902	PET film on both sides with a special melt adhesive on both sides. For conductors or turns.
CONDUCTOFOL® K 2010	With polyimide film for high thermal stress, Thermal class H (180 °C)
CONDUCTOFOL® K 2011	With polyimide film and silicone resin for high thermal stress. Thermal class H (180 °C)
PRINOM® E 2084	Thermosetting Nomex® (Type 410) prepreg, one side coated with modified epoxy resin. Thermal class H (180 °C)
PRINOM® B 2083	Thermosetting Nomex® (Type 410) prepreg, both sides coated with modified epoxy resin with release film. Thermal class H (180 °C)

SURITEX® & SURIFOL

Uncalcined mica paper impregnated with modified silicone resin on a glass cloth (SURITEX®) or film (SURIFOL) carrier to produce flame-resistant cables to retain function at temperatures above 1000°C

SURITEX® 0291	With muscovite mica
SURITEX® 0822	With phlogopite mica
SURIFOL 2990	With phlogopite on film carrier

Preconsolidation and Auxiliary Material

VOTAFIX® E 2102	Resin-rich epoxy glass cloth prepreg, to preconsolidate high voltage machine coils
VOTAFIX® TGB 0941	Rigid epoxy glass layer, covered on both sides with epoxy glass fleece prepreg, as compressible separator in rows of roebel bars
VOTAFIX® NGB 2268	As 0941 but with Nomex® layer, as interlayer under the transpositions in roebel bars
VOTASTOP® 2235	Uncalcined mica paper prepreg to fill cavities and as a filler in coils and bars of high voltage machines
VOTAMASTIC 0616	Epoxy resin with mica filler for filling paste on bars and coils.
VOTAMASTIC 0839	Flexible Epoxy varnish for sealed flexible nose on high voltage coils
VOTAFILM® TPB 2101	Silicone release paper, coated on both sides for use in the curing process of thermosetting resins
VOTAFILM® 2646	Release film coated with silicone on both sides for use with thermosetting resins
VOTAFILM® 2645	As 2646, thermo shrinking type
FLEXIBELMICANIT 2240	Flexible phlogopite mica paper laminate on a silicon resin basis for cover plates for heating elements, in induction furnaces, as a cavity filler, for gaskets and seals or for insulating spacers machines subject to high thermal stress. Used up to a range of 900 °C - 1100 °C. It remains flexible even after thermal stress.

VPI Technology

POWERFAB® Technology

Ultra thin tape technology

POROFAB® 3292	Uncalcined muscovite mica paper with ultra-thin glass carrier
POROFAB® ME 3434	Uncalcined muscovite mica paper with ultra-thin glass carrier containing metallic salt accelerator

POROBAND® and POROFOL®

Porous mica paper tapes with low resin content having a glass cloth (POROBAND®) or film (POROFOL) carrier for continuous main insulation up to the highest voltages

POROBAND® 0410	Standard type with uncalcined muscovite mica paper
POROBAND® ME 2072	Standard type with accelerator for epoxy resin-anhydride systems
POROBAND® ME 2599	As ME 2072, for highest insulation thicknesses and rated voltages
POROBAND® 3321	Duplex Glass , uncalcined mica paper for Flat Coil Technology
POROBAND® 342206	Duplex Glass, uncalcined mica paper for 13.8 kv applications
POROBAND® 4373	Triplex :Glass, calcined muscovite mica paper, PET mat/fleece Epoxy based adhesive
POROBAND® 3470	Same as 4373, softer for hand taping Polyester based adhesive
POROBAND® SI 0790	Calcined mica paper reinforced by aramid fibres for silicone-based systems
POROBAND® SI 2577	Calcined muscovite mica paper with aramid fibre content on glass cloth as carrier, a modified silicone resin is used as binder. Thermal class C (240 °C), for insulation of coils or bars of traction machines
POROFOL® 2076	Standard type with uncalcined mica paper and PET film
POROFOL® ME 2075	Standard type with accelerator for epoxy resin-anhydride systems
POROFOL® SR 0554	As 2076, with thermo-shrinking PET carrier film
POROFOL® 0546	As 2076, with additional PET fleece top layer
ISOSEAL® MF 0611	Thermo-shrinking polyester glass fabric / PET film tape, used as top-sealing layer, red-brown colour
ISOSEAL® ME MF 2420	As MF 0611 with accelerator for epoxy resin-anhydride systems
ISOSEAL® ARMOR MICA 3121	Duplex 4 mil glass fabric, 4mil calcined mica paper as finish armor layer
ISOSEAL® ARMOR 6700	Treated polyester- glass armor tape for V.P.I with accelerator

POROMAT®

Expandable porous epoxy laminate, used as interlayer, spacer and filling material

POROMAT® 2248	Expandable porous epoxy glass mat, both sides covered with PET fleece, as interlayer, spacer and filling material
POROMAT® ME 2242	As 2248, but contains accelerator for epoxy resin-anhydride systems, for highest mechanical stress
POROFILZ 2074	Highly absorbent and soft PET felt, for use as spacer and filling material
POROFILZ ME 2070	Contains accelerator for epoxy resin-anhydride systems

VOTASTAT® VPI-Resin

Low-viscosity impregnating epoxy resins for vacuum pressure impregnation of coils and bars as well as for the global impregnation of electrical machines

VOTASTAT® 2110	2-component impregnating resin, consisting of a bisphenol-A epoxy resin and a liquid acid-anhydride hardener with very long pot life and shelf life, also available readymixed as VOTASTAT VP 1168
VOTASTAT® 100K/XD4150	Solvent-free one-component epoxy resin with a very long pot life
VOTASTAT® XD4159	Solvent-free thixotropic one-component resin with a very long pot life, excellent cavity-filling ability
VOTASTAT® SI 4800	Silicone resin for traction motor applications
ISOLAC R1000	Epoxy varnish applied to conductors and acts as lubricant during looping

Resin Rich Technology

POWERFAB® Technology

Ultra thin tape technology

CALMICAFAB® 3293	Calcined muscovite mica paper with ultra-thin glass carrier for high performance mainwall
CALMICAFAB® 3294	as type 3293, interleaved
CALMICAFAB® 3417	as type 3294, higher resin flow for easier processing
CALMICAFAB® 3450	as type 3293 with enhanced mechanical performance

CALMICA® and CALMICAGLAS®

Thermal class F-H (155 °C - 180 °C), thermosetting materials for main insulations, based on a mica paper fully impregnated with high temperature resistant epoxy resin, on a film (CALMICA®) or glasscloth (CALMICAGLAS®) carrier

CALMICA® 70 0900	PET film carrier with calcined mica, for coils and bars of high voltage machines
CALMICA® 0867	PET film carrier with uncalcined mica paper, for coils and bars of high voltage machines
CALMICA® S100 3052	Calcined mica paper on shrinkable PET film carrier, for coils and bars of high voltage machines
CALMICAGLAS® 0409	Glass with calcined mica paper, for highest output and voltage
CALMICAGLAS® 2005	as 0409, interleaved
CALMICAGLAS® 0893	With uncalcined mica, for coils and bars of low- and high-voltage machines
CALMICAGLAS® 4800	Glass with calcined mica paper, b-stage epoxy for high voltage bars and coils
CALMICAGLAS® 4802	Same as 4800 except with twice the mica content, uncalcined mica
CALMICAGLAS® 4820	Same as 4800 except with high resin content for low pressure applications

Conductive Materials

Shielding and Grading Tapes

CONTAFEL H 0865	Highly flexible, absorbent, conductive PET fleece for corona protection on high voltage bars and coils
CONTAFEL 2716	Conductive PET / glass fabric for corona protection
CONTAFEL 3080	Conductive PET / glass fabric, ultra thin
CONTAFELPREG 2564	Conductive thermosetting PET fleece, for RR-film applications
CONTAGLAS 2912	Conductive glass cloth for high performance corona protection
EGSB 2709, 2969	Semi conductive thermosetting PET fabric tape as endgrading, for VPI applications (2709) and RR-applications (2969)
CONTAVAL 2017	Conductive epoxy glass laminate, as slot filler. Thermal class F (155 °C)

Low to Medium Voltage Slot and End Winding Insulation

FEINMICAGLAS

Tapes made of electrical grade mica paper backed with glass cloth, flexible when fully cured

FEINMICAGLAS 2596	Mica paper and glass cloth tape, two-ply
FEINMICAGLAS 0986	As 2596 with PET film on both sides, also suitable for single conductors and rotor coils of medium voltage traction motors, four-ply
FEINMICAGLAS 2128	Four-ply with unidirectional glass yarns and PET film on both sides, for overhangs and connections with tight bends
FEINMICAGLAS F 4462	PET film/glass/ mica paper/PET film highly conformable for easy taping



CALMICA-FLEX®

Thermosetting electrical grade quality mica paper glasscloth, cures to a semiflexible state

CALMICA-FLEX® 0917	Glass cloth / mica tape, two-ply
CALMICA-FLEX® 0919	PET / glass / mica / PET tape, four-ply
CALMICA-FLEX® 0421	Four-ply with unidirectional glass yarns and PET film on both sides
CALMICA-FLEX® 0824	Glass / mica / film, good resistance to humidity and extreme ambient conditions, three-ply
ISOSEAL® P 0713	Red-brown, thermosetting epoxy / PET cloth sealing tape, for the final layer covering on end windings

Traction Motors

FEINMICAGLAS H 4351	Glass with calcined mica paper, fully cured silicone, for traction application Thermal class H (180 °C)
FEINMICAGLAS H 4317	Glass / calcined mica paper / Polyimide film, for traction application Thermal class H (180 °C)
CALMICA-FLEX® SI 2726	Flexible silicone based / mica / glass tape. Thermal class H-C (180 °C - 220 °C), two-ply

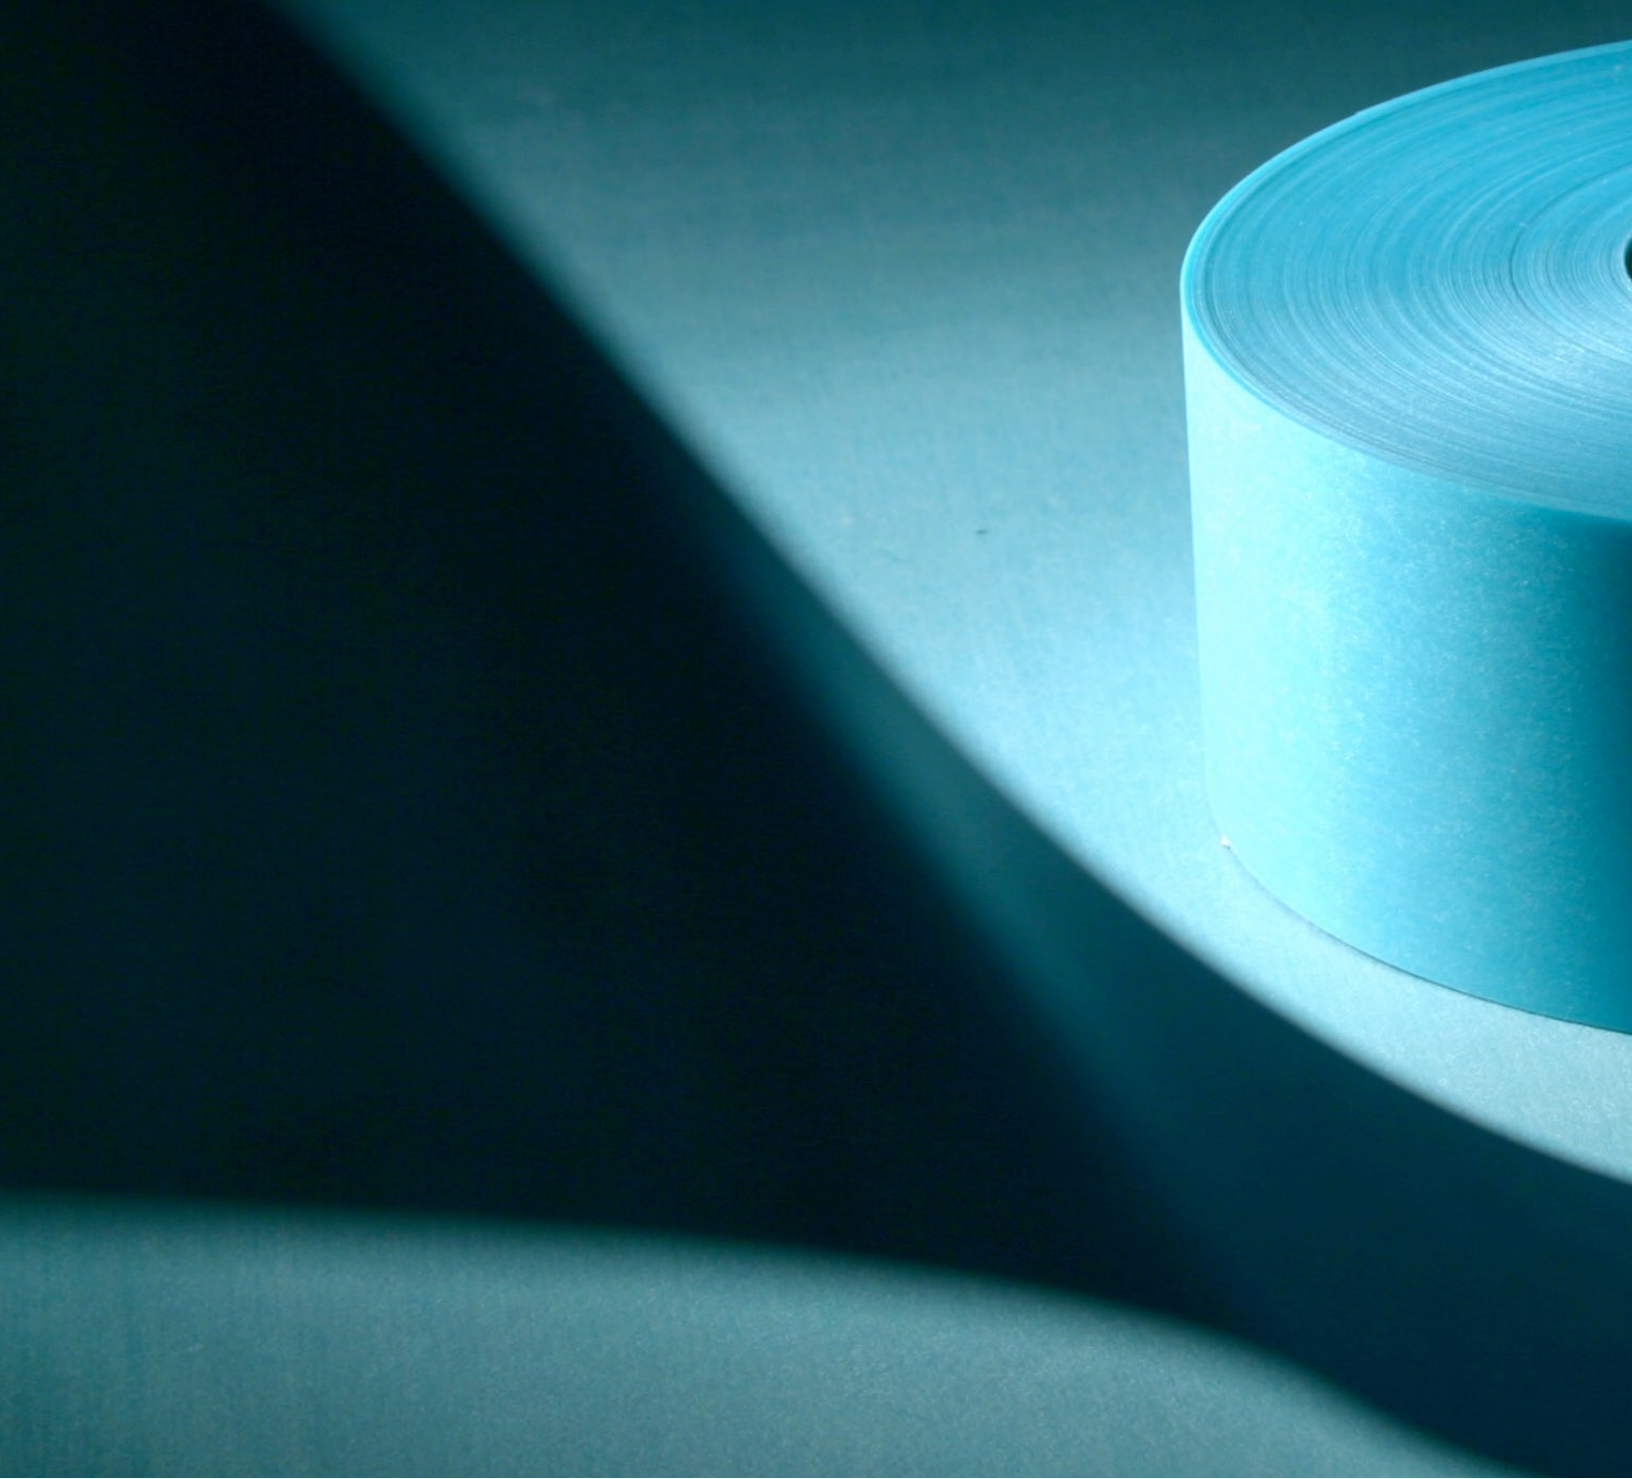



Low Voltage & Transformer

Flexible Insulation Materials

Nomex®

Kapton®

Varnished Fabrics

Prepregs

CAT-Film®

ISOAD Tapes

Silicone Coated Materials

Resins and Varnishes

Flexible Insulation Materials

ISOSPAN®

Laminates with cellulose or cotton paper and PET film. Thermal class B (130 °C), for slot and phase insulation in low voltage motors or as interlayer insulation in choke coils and small dry type transformers

2 Layers with Cellulose Paper / PET Film

- ISOSPAN® KM 3623 Kraft paper / PET film. Paper made from pulp of high mechanical strength
- ISOSPAN® PM 3624 Presspan / PET film. Multilayer paper of high chemical purity, smooth surface. Paper in green and brown colors available

3 Layers with Cellulose Paper / PET Film

- ISOSPAN® KMK 3625 Kraft paper / PET film / Kraft paper
Paper made from pulp of high mechanical strength
- ISOSPAN® PMP 3626 Presspaper / PET film / Presspan
Multilayer paper of high chemical purity. Smooth surface
- ISOSPAN® MPM 3627 PET film / Presspan / PET film.
Multilayer paper of high chemical purity. Smooth surface
- ISOSPAN® AMA 3628 Calander Kraft / PET / Calander Kraft
Highly calendered paper. Brown colour

2 Layers with Cotton Paper / PET Film

- ISOSPAN® RM 3631 Rag cotton paper / PET film
Paper made entirely from cotton fiber or cotton fiber linters
- ISOSPAN® FM 3629 Cotton-cellulose crepped paper / PET film
Creped paper made from pulp of cotton and cellulose

3 Layers with Cotton Paper / PET Film

- ISOSPAN® MRM 3632 PET film / Rag cotton paper / PET film
Paper made entirely from cotton or cotton-linters
- ISOSPAN® RMR 3633 Rag cotton paper / PET film / Rag cotton paper
Paper made entirely from cotton or cotton-linters
- ISOSPAN® FMF 3630 Creped paper / PET film / Creped paper
Paper made from cotton cellulose pulp

PET Films

We carry a large selection of different PET films (polyethylene therephthalate) from leading manufacturers and can offer customized solutions for just about any application.

VOLTAFLX®

DM (2-Layers) or DMD (3-Layers) laminates with PET film and PET fleece, for slot, layer and phase insulation for electrical motors, generators and transformers

2-Layers with 50µm/2mil PET Fleece

VOLTAFLX® E 0936	Unsaturated, white. Thermal class B-F (130 °C - 155 °C)
VOLTAFLX® E 0951	70% saturated, white. Thermal class B-F (130 °C - 155 °C)
VOLTAFLX® 6644	100% saturated, blue. Thermal class B-F (130 °C - 155 °C)

3-Layers with 50µm/2mil PET Fleece

VOLTAFLX® 2598	70% saturated, white. Thermal class B-F (130 °C - 155 °C)
VOLTAFLX® F 6642	100% saturated, blue. Thermal class F (155 °C)
VOLTAFLX® F 0768	100% saturated, blue, smoothened surface. Thermal class F (155 °C)

3-Layers with 80µm/3mil PET Fleece

VOLTAFLX® 3 6641	70% saturated, white. Thermal class B-F (130 °C - 155 °C)
VOLTAFLX® 3F 6641	100% saturated, blue. Thermal class F (155 °C)
VOLTAFLX® 3F 0367	100% saturated, blue, smoothened surface. Thermal class F (155 °C)
VOLTAFLX® DMD3 0180	100% saturated, white. Thermal class F-H (155 °C - 180 °C)

3-Layers with 125µm/5mil PET Fleece

VOLTAFLX® F 2931	70% saturated, white. Thermal class B-F (130 °C - 155 °C)
VOLTAFLX® F 2917	100% saturated, blue. Thermal class F (155 °C)
VOLTAFLX® DMD5 0180	100% saturated, white. Thermal class F-H (155 °C - 180 °C)
VOLTAFLX® ME 2761	Unsaturated, highly absorbent fleece, red, contains accelerator. Thermal class B-F (130 °C - 155 °C)

3-Layers with 180µm/7mil PET Fleece

VOLTAFLX® 2526 and VOLTAFLX T	Unsaturated, embossed, highly absorbent fleece, white. Thermal class B-F (130 °C - 155 °C)
----------------------------------	---

Multilayer Laminates

Laminates for wedges, strips and punched pieces in electrical machines and for barrier insulation in transformers

VOLTAFLX® 2906	Based on VOLTAFLX® 0768, bonded with a temperature resistant resin. Thermal class F (155 °C). Supplied in sheets, available thicknesses 1 - 6 mm
VOLTAFLX® 2983	Multilayer PET fleece and PET film laminate. Supplied in rolls or sheets, thickness up to 1.5 mm
KOMBIMAT 2339	PET / PEN film laminate. Thermal class F (155 °C)
KOMBIMAT 2450	Multilayer PET film laminate. Thermal class B (130 °C)
KOMBIMAT 2822	Multilayer PET film laminate with improved adhesion properties

ISONOM®

NM or NMN Laminates of Nomex® with PET Film

Thermal class F-H (155 °C -180 °C), for slot, layer and phase insulation for electrical motors, generators and transformers

2-Layers with calendered Nomex®

ISONOM® NM 0880	Nomex® Type 464/050µm/2mil
ISONOM® NM 8 0882	Nomex® Type 416/080µm/3mil
ISONOM® NM 13 0950	Nomex® Type 416/130µm/5mil
ISONOM® NM 18 2883	Nomex® Type 410/180µm/7mil
ISONOM® NM 25 2882	Nomex® Type 410/250µm/10mil

2-Layers with uncalendered Nomex®

ISONOM® NM 2041	Nomex® Type 411/130µm/5mil
ISONOM® NM PH 2682	Nomex® Type 411/130µm/5mil, PSA coating on one side (PET film)

3-Layers with calendered Nomex®

ISONOM® NMN 0881	Nomex® Type 464/050µm/2mil
ISONOM® NMN 3211	Nomex® Type 464/050µm/2mil, Top coated
ISONOM® NMN PH 2045	Nomex® Type 464/050µm/2mil, adhesive coating on one side
ISONOM® NMN 2796	Nomex® Type 416/050µm/2mil
ISONOM® NMN 8 0883	Nomex® Type 416/080µm/3mil
ISONOM® NMN ME 2459	Nomex® Type 416/080µm/3mil, lacquered with an accelerator
ISONOM® NMN 13 0967	Nomex® Type 416/130µm/5mil
ISONOM® NMN 8 2800	Nomex® Type 418/080µm/3mil, contains mica

3-Layers with uncalendered Nomex®

ISONOM® NMN 2035	Nomex® Type 411/130µm/5mil
------------------	----------------------------

4-Layers with calendered Nomex®

ISONOM® NMNM 3266	Nomex® Type 464/050µm/2mil, 12µm PET film on one side
ISONOM® NMNM 2298	Nomex® Type 464/050µm/2mil, 23µm PET film on one side
ISONOM® NMNM 3330	Nomex® Type 416/130µm/5mil, 12µm PET film on one side
ISONOM® NMNM 2798	Nomex® Type 416/080µm/3mil, 23µm PET film on one side

NX and NXN laminates of Nomex® and PEN Film (polyethylene naphthalate film)

Thermal class F-H (155 °C - 180 °C), for applications which are exposed to high thermal stress

ISONOM® NX 2750	Nomex® Type 464/50µm/2mil laminated with PEN film on one side. Thermal class F-H (155 °C - 180 °C)
ISONOM® NXN 2751	Nomex® Type 464/50µm/2mil laminated with PEN film as core layer. Thermal class H (180 °C)

NK or NKN laminates of Nomex® and Polyimide Film

Thermal class H-C (180 °C - 200 °C), for slot, layer and phase insulation for electrical motors, generators and transformers exposed to high thermal stress

2-Layers with calendered Nomex®

ISONOM® NK 2530	Nomex® Type 464/050µm/2mil
ISONOM® NK 8 2261	Nomex® Type 416/080µm/3mil
ISONOM® NK 13 3008	Nomex® Type 416/130µm/5mil
ISONOM® NK 18 2563	Nomex® Type 410/180µm/7mil

3-Layers with calendered Nomex®

ISONOM® NKN 0885	Nomex® Type 464/050µm/2mil
ISONOM® NKN 8 0886	Nomex® Type 416/080µm/3mil
ISONOM® NKN 13 0887	Nomex® Type 416/130µm/5mil
ISONOM® NKN 3643	Nomex® Type 410/050µm/2mil
ISONOM® NKN 8 3644	Nomex® Type 410/080µm/3mil
ISONOM® NKN 13 3645	Nomex® Type 410/130µm/5mil
ISONOM® NKN 18 2281	Nomex® Type 410/180µm/7mil
ISONOM® NKN 25 2664	Nomex® Type 410/250µm/10mil
ISONOM® NKN 2558	Nomex® Type 416/080µm/3mil and 130µm/5mil, asymmetric
ISONOM® KNK 2711	Nomex® Type 410, 416 or 464 laminated with PI film on both sides

3-Layers with uncalendered Nomex®

ISONOM® NKN 2039	Nomex® Type 411/130µm/5mil
------------------	----------------------------

2- and 3-Layer Laminates of Nomex® and Glass Cloth or Glass Fleece

Thermal class H-C (180 °C - 200 °C), for applications which are exposed to high thermal stress

ISONOM® NG 0888	Nomex® Type 411 with glass cloth on one side
ISONOM® NGN 3543	Nomex® Type 416 or 464 with glass cloth as a core layer
ISONOM® NMG 2042	Nomex® Type 411 with PET film as a core layer and glass cloth on one side
ISONOM® BNB 0582	Nomex® Type 410, 416 or 464 laminated with glass fleece on both sides

Laminates of Nomex® and Mica Paper

Thermal class H-C (180 °C - 200 °C), for slot, layer and phase insulation for electrical motors, generators and transformers exposed to high thermal stress, especially where corona resistant and flame retardant properties are required

ISONOM® NMiN 3209	Nomex® Type 416 or 464 with mica paper as a core layer
ISONOM® NMMiG 3467	Nomex® Type 416 or 464 with PET film and mica paper as a core layer and glass cloth on the outside
ISONOM® NMMiN 3419	Nomex® Type 464/50µm/2mil on the outside and PET film and mica paper as a core layer

GK or GKG Laminates of Glass Cloth and Polyimide Film

Thermal class H-C (180 °C - 200 °C), for slot, layer and phase insulation for electrical motors, generators and transformers exposed to high thermal stress

VOLTALEX® GK 2797	PI film with glass cloth 25 g/m ² on one side
VOLTALEX® GK 2799	PI film with glass cloth 50 g/m ² on one side
VOLTALEX® GKG 2064	PI film with glass cloth 25 g/m ² on both sides

Nomex®

We are an authorized distributor of DuPont™ Nomex® throughout Africa, Andean countries, China, Europe, Hong Kong, Middle East, North and Central America, Russia and other parts of the world for many years and can offer the complete range of products. We will be happy to supply technical information and datasheets.

Kapton®

We are an authorized distributor of DuPont™ Kapton® throughout Europe and Mexico. We will be happy to supply technical information and datasheets.

Varnished Fabrics

DEGLAS® FG 0932	Electrical grade glass cloth impregnated with a polyurethane resin with very high tensile strength. For phase insulation for motors and generators, for ground, barrier and layer insulation for transformers, wrapping applications. Thermal class F (155 °C)
DEGLAS® DNL 2019	As DEGLAS® FG 0932 but bias cut and seamless, designed for taping tight bends. Thermal class F (155 °C)
DEGLAS® FG 2949	Electrical grade glass cloth impregnated with a modified polyester resin. For phase insulation for motors and generators, for ground, barrier and layer insulation for transformers, wrapping applications. Thermal class H (180 °C)
SILGLAS FG 2090	Alkali free glass cloth impregnated with a special silicon rubber, parallel warp threads to the edges. For phase insulation for motors and generators, for ground, barrier and layer insulation for transformers, high temperature wrapping applications. Thermal class H (180 °C)
TRAFOGITTER	Impregnated and fully cured wide-meshed glass fabric. For use as a spacer and reinforcement in transformer castings. Thermal class F (155 °C)

Prepregs

Various materials impregnated with epoxy or polyester resins in B-stage. The material is shaped by the user and cured under pressure and heat

ISOGLAS / VITROGLAS	Banding tape, consisting of unidirectional glass fibres coated with thermosetting polyester resin in B-stage. For end winding bracing, banding of transformer cores and traction armatures
PRINOM® E 2084	Thermosetting Nomex® (Type 410) prepreg, one side coated with modified epoxy resin. Thermal class H (180 °C)
PRINOM® E 3573	Thermosetting Nomex® (Type 410) prepreg, one side coated with modified epoxy resin. Fast curing. Thermal class H (180 °C)
PRINOM® B 2083	Thermosetting Nomex® (Type 410) prepreg, both sides coated with modified epoxy resin. Supplied with release film. Thermal class H (180 °C)
PRINOM® B 3537	As PRINOM® B 2083 but with increased resin content. Thermal class H (180 °C)
PRINOM® B 3574	Thermosetting Nomex® (Type 410) prepreg, both sides coated with modified epoxy resin. Fast curing. Supplied without release film. Thermal class H (180 °C)
PRINOM® U 0622	Thermosetting uncalendered Nomex® (Type 411) prepreg, both sides coated with modified epoxy resin. Thermal class H (180 °C)
ISOPREG® PET 0876	Thermosetting PET film prepreg, both sides coated with modified epoxy resin. Thermal class B (130 °C)
ISOPREG® EP 1069	Fast curing glass cloth prepreg with long shelf life. For L- and U-channels of turbogenerators. Thermal class F (155 °C)
ISOPREG® EP 2047	Glass cloth prepreg with high mechanical and chemical strength at high temperatures. Used to produce tubes, plates, angles and sections. Thermal class H (180 °C)
ISOPREG® EP 2701	Thermosetting glass cloth-prepreg, exhibits very good thermal and chemical resistance as well as very good mechanical properties also at elevated operating temperatures. Thermal class H (180 °C)
ISOPREG® FR 1179	E-glass filament-prepreg, halogen-free, low-smoke and flame-resistant. Shows good adhesion and is suitable for low pressure curing. Thermal class H (180 °C)
ISOPREG® PET F 2659	PET felt, impregnated with a high active epoxy resin. Designed for insulation of transformers
VLIESPREG 0740/2870	Thermosetting PET fleece prepreg, impregnated with modified epoxy resin. 0740 containing interlayer, 2870 without interlayer.
VOLTAFLEXPREG 2694	Thermosetting DMD prepreg, both sides coated with modified epoxy resin. Thermal class F (155 °C)
ISONOM® NMN PREG	Thermosetting NMN prepreg, both sides coated with modified epoxy resin. Thermal class H (180 °C)

Flame Retardant Insulation Materials

The combination of flame retardant (FR) properties of glass, mica, Nomex[®], PET-FR and a variety of recently developed flame retardant resin systems give us the possibility to offer a range of FR products. FR laminates and FR prepregs are the solution, when combination of electrical insulation and flame retardancy is needed.

Oil Filled Transformers

Within this application we offer a wide range of adhesive tapes, creped materials, diamond dotted products, pressboards, rods, spacers, strips, tubes and various papers. Please let us know your needs and we will be happy to provide you with more detailed information.

Fabrication Services

In China, Europe and North America we are fabricating and converting flexible materials to your request. Our capabilities include cold and hot forming, feathering, printing, punching and slitting.

CAT-Film[®] EME 3634

Coated paper / PET film laminates used for graphic applications and labeling systems.
Resistant to common chemical compounds, high temperature and enhanced mechanical properties.

ISOAD Tapes

Different carriers with acrylic (thermosetting or non curing) or polysiloxane (silicone) adhesive coatings.

ISOAD Tape 1000 Series	PE (polyethylene) or PP (polypropylene) film carrier
ISOAD Tape 2000 Series	PET film carrier
ISOAD Tape 3000 Series	Paper carrier
ISOAD Tape 4000 Series	Nomex [®] paper carrier
ISOAD Tape 5000 Series	Glass fabric carrier
ISOAD Tape 6000 Series	Textile fabric carrier
ISOAD Tape 7000 Series	PI film carrier
ISOAD Tape 9000 Series	Metalfoil carrier

Silicone Coated Materials

Accurate and stable silicone release coatings on all types of papers and films

Silicone Coated Films

FES 1025	LD PE hazy, medium release
FES 1225	HD PE hazy, medium release
FES 1230	HD PE hazy, medium release, blue color
FOS 1525	PP hazy, medium release
FPS 2000	PET transparent, medium release
FPS 2010	PET (Mylar®), medium release
FPS 2100	PET thermo shrinkable MD, medium release
FPS 2125	PET thermo shrinkable TD, medium release

Silicone Coated Papers

PLS 3000	Cellulose paper, white colour, medium-high release
PGS 3025	Glassine paper, white colour, medium-high release
PKS 3200	Kraft paper, brown colour, low release
PES 3900	Coated paper, white colour, high release

Resins and Varnishes


Insulating Impregnation Varnishes

L.I.S.A. 1	Water borne oven drying impregnating varnish based on modified alkyd resin, environmentally compatible water dilutable impregnating varnish. For motor and transformer coils that permit oven drying at temperatures between 120 °C and 150°C
------------	---

Magnet Wire Enamels

ISOLAC CA 110 S	THEIC modified polyesterimide resin based varnish. For enamelling of round copper wires of diameters between 0.3 mm and 4 mm with thermal class N (200 °C) at slow running enamelling machines up to dv 40, as single coat or as a base coat
ISOLAC CA 110 37 F1	THEIC modified polyesterimide resin based varnish. For enamelling of round copper wires of diameters between 0.3 mm and 3 mm with thermal class N (200 °C) at fast running enamelling machines of dv > 100, as single coat or as a base coat
ISOLAC CA 300	Elastified polyesterimide varnish. Thermal class H (180 °C). High elasticity for enamelling of round copper wires up to 6mm diameter or rectangular profiles
ISOLAC PAI 111	Polyamidimide resin based varnish for use as an overcoat in dual coat systems for round copper wires of diameters between 0.3 mm to 3 mm. Thermal class N (200 °C). To achieve very smooth surfaces with high resistance against solvents, freon and transformer oil
ISOLAC PE 75	Elastified polyester varnish for use as an adhesive primer for round and rectangular copper wires



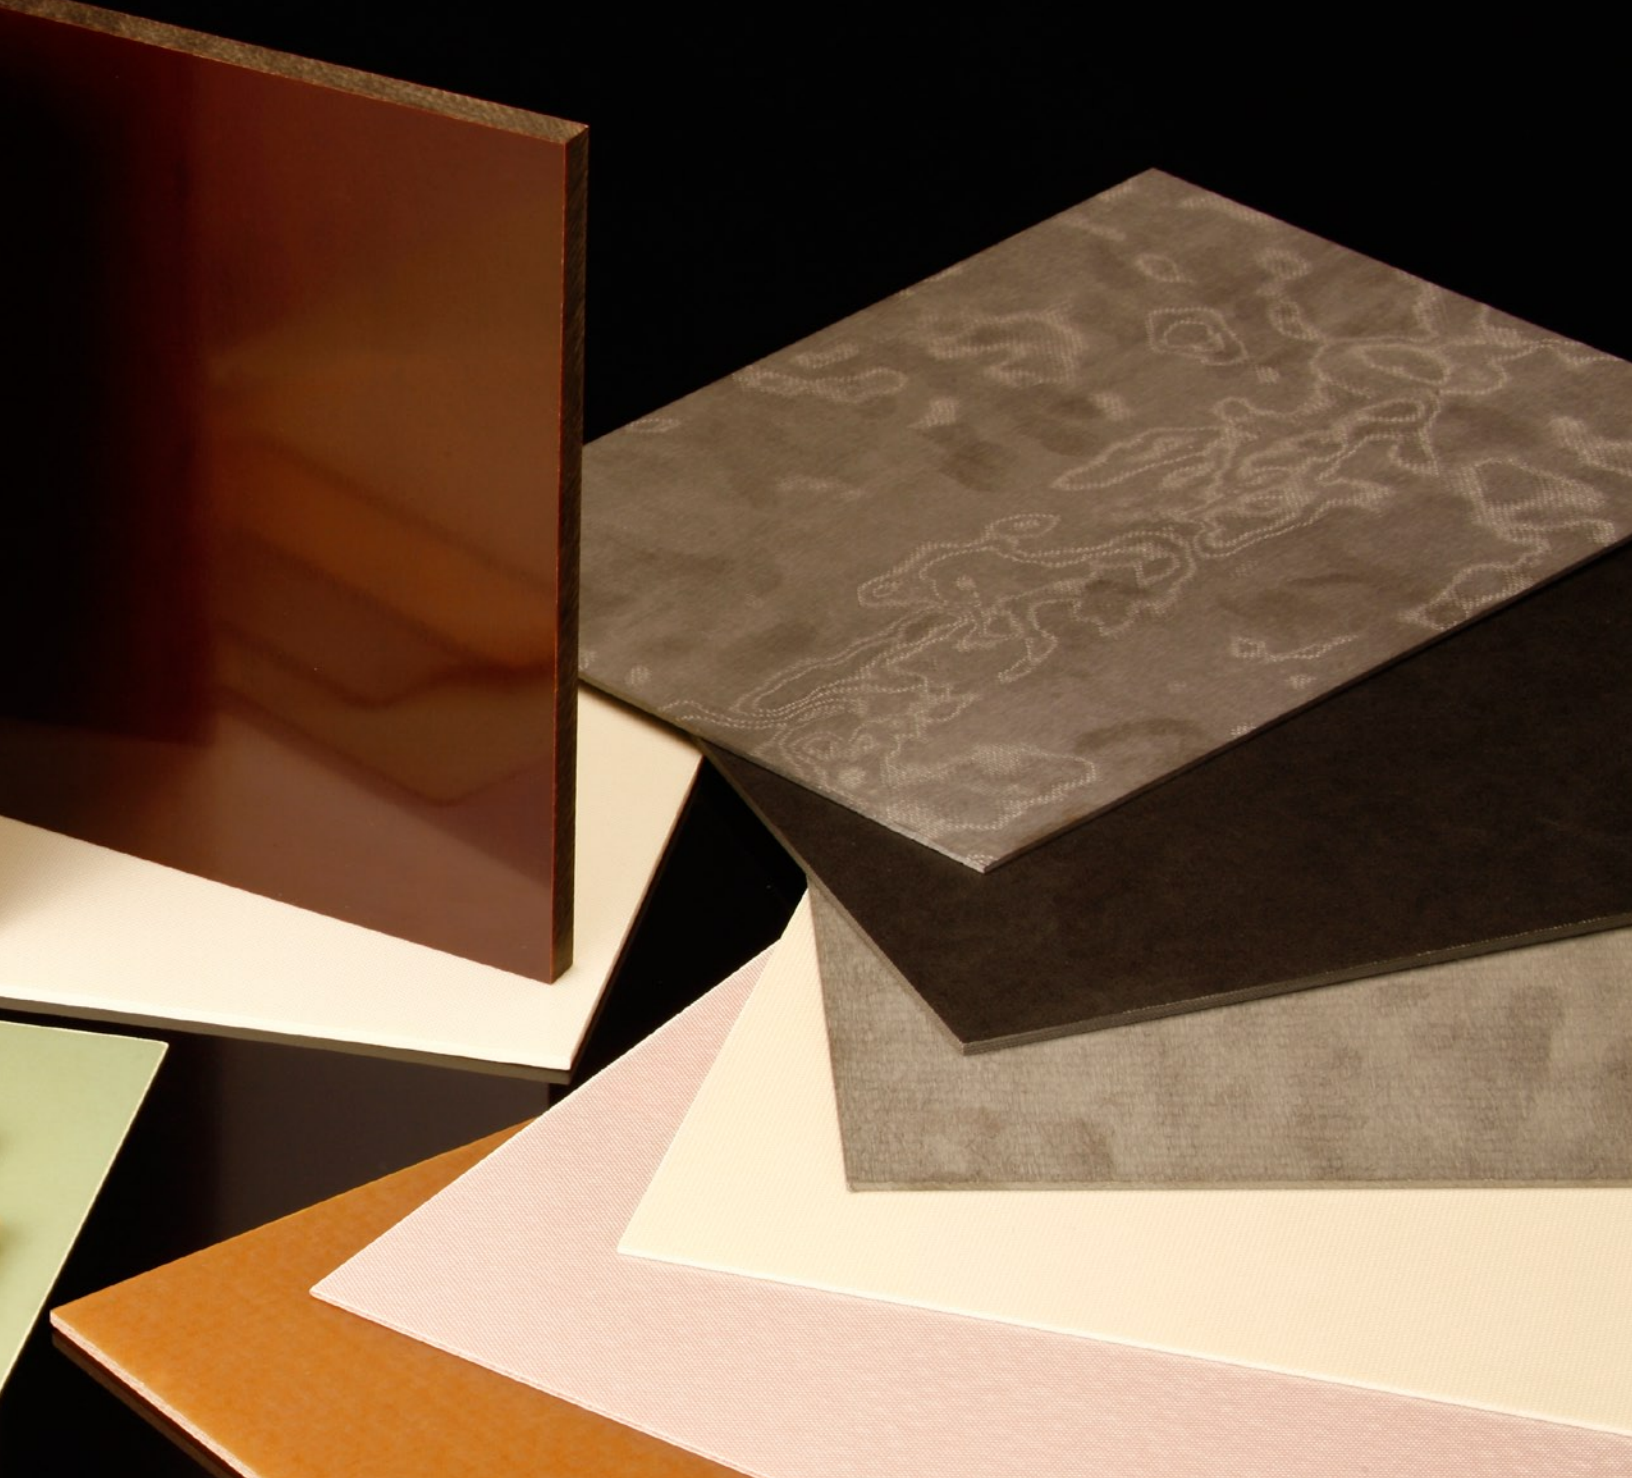

Prepregs & Laminates ▪ Industrial

Paper and Cotton Fabric based Laminates

Glass fibre based Laminates

Tubes and Rods

Paper and Cotton Fabric based Laminates

VOLTIS® Hp

Phenolic paper laminates

VOLTIS® Hp 2061 (PF CP 201)	Highest mechanical strength, good electric properties at normal humidity
VOLTIS® Hp 2061.5 (PF CP 202)	High electric strength in oil, used in high voltage range at power frequencies

VOLTIS® Hgw

Phenolic cotton laminates

VOLTIS® Hgw 2082 (PF CC 201)	Viscoplastic material for mechanical application
VOLTIS® Hgw 2082.5 CE (PF CC 202)	Viscoplastic material for mechanical and electrical application
VOLTIS® Hgw 2083 (PF CC 203)	Viscoplastic material for mechanical application and finely machined parts

VOLTIS® LC

Rubber clad laminates

VOLTIS® LC 141 EPP	Also with PTFE or PP film, best solvent resistance
VOLTIS® LC 205 EPP	Also with PTFE or PP film, easier to punch

BORD

Special laminates

S-BORD®	Phenolic paper laminate for punched pieces for the lighting industry
K-BORD®	Special paper laminate with glass fabric on both sides for applications as counter matrices

INBORD®

Laminates with melamine surface

INBORD® E	Tracking index CTI 600 for switchgear and electric appliances
INBORD® M	Tracking index CTI 200 for mechanical applications and punched pieces
INBORD® EGS	Tracking index CTI 600 for switchgear with improved safety in case of arcing, with additional glass fabric reinforcement

Table of Standards for paper and cotton fabric based laminates

Comparable Standards to IEC 60893 (= EN 60893)

IEC 60893	PF CP 201	PF CP 202	PF CP 206	PF CP 204	PF CC 201	PF CC 202	PF CC 203
DIN 7735	Hp 2061	Hp 2061.5	Hp 2062.8	Hp 2063	Hgw 2082	Hgw 2082.5	Hgw 2083
NEMA LI 1	X, XP	-	XXP	XXXP	C	CE	L
BS 2572	P1	-	P3	P4	F2	F4	F1
JIS K6912 >3 mm	PL-PM	-	PL -PEM	PL-PEV	PL-FCM	PL-FCE	PL-FLI
JIS K6912 <3 mm	PL-P-P	-	PL-PES-P	PL-PEV	-	-	-

Glass Fibre based Laminates

ISOVAL®

Epoxy glass fiber laminates with the high-performance and temperature resistant ISOVAL® resin system

ISOVAL® A (EP GC 201)	With glass filament cloth for test adapters in printed circuit testing equipment
ISOVAL® 10 R (similar to EP GC 201)	With glass roving fabric for larger parts and thermal insulation. Thermal class H (180 °C)
ISOVAL® 11 (EP GC 203 & 308)	With glass filament fabric, for electric appliances and transformers, high flexural strength at elevated operating temperatures. Thermal class H (180 °C)
ISOVAL® 11 HKB (EP GC 306 & 308)	High tracking resistance (CTI 600) glass filament fabric. Thermal class H (180 °C), construction material in electric appliances and switchgear, especially for applications where surface contamination occurs
ISOVAL® TM (EP GC 308)	With glass filament fabric, high-quality construction material for a wide variety of high-temperature applications. Thermal class H (180 °C)
ISOVAL® FR4-HF (EP GC 202)	Flame-resistant, halogen-free glass fabric laminate Type FR4. Thermal class H (180 °C)
ISOVAL® R (EP GC 205)	With glass roving fabric, similar to ISOVAL® 11, but for larger parts. Thermal class H (180 °C)
ISOVAL® RKB-FR (similar to EP GC 202)	Tracking resistance of CTI 600, glass roving fabric laminate, for insulating partitions in switchgear. Thermal class F (155 °C)

CONTAVAL® 2017	Glass filament for conductive corona protection for slot packing in high voltage machines. Thermal class H (180 °C)
MAGNOVAL®	Iron powder filled epoxy laminate for magnetic slot wedges in high voltage machines. Thermal class F (155 °C) and H (180 °C)
VOLTIS® ME	Tracking resistant melamine-glass filament for mechanical and electrical applications, arc resistant and low flammability
VOLTACOMP®	Epoxy-glass roving fabric with outstanding mechanical and thermal properties for high-performance applications, such as in the composite industry
VOLTIS® SI (SI GC 202)	Silicone / glass fabric laminate, insulating material for high-frequency applications in electrical appliances and transformers, subject to high operating temperatures, but only moderate mechanical stress. Thermal class H (180 °C)
VOLTIS® Hgw 2072	Phenolic / glass filament fabric for applications under high temperatures, flame resistant
RAVOTHERM® RM	Mica paper with silicone resin, for electric and thermal applications. Thermal class C (> 220 °C)

Table of Standards for Glass Fibre Laminates

Comparable Standards to IEC 60893 (= EN 60893)

IEC 60893	EP GC 201	EP GC 202	EP GC 203	EP GC 205	EP GC 306	EP GC 308	SI GC 202	PF GC 201
DIN 7735	Hgw 2372	Hgw 2372.1	Hgw 2372.4	Hgw 2370.4	-	-	Hgw 2572	Hgw 2072
NEMA LI 1	G 10	FR 4	G 11	-	-	-	G 7	G 3
BS 3953	EP-3	EP-4	EP-5	-	-	EP-7	SI 5	-
JIS K 6912	EL-GEM	EL-GEF	EL-GEH	(EL-GEH)	-	-	SL-GSE	PL-GH

Tubes and Rods

VOLTIS® and ISOVAL®

Round rolled and round moulded tubes and rods

VOLTIS® Hp TU 21	Round rolled phenolic paper laminate tube for mechanical and electrical applications
VOLTIS® Hgw TU 21	Round rolled phenolic fine weave cotton cloth tube with high toughness and excellent machinability for mechanical applications
VOLTIS® Hgw TU 22	Round rolled phenolic cotton cloth tube with high toughness for mechanical applications
VOLTIS® Hgw RO 41	Round molded phenolic fine weave cotton cloth rod with high toughness and excellent machinability for mechanical applications
VOLTIS® Hgw RO 42	Round molded phenolic cotton fabric laminate rod with high toughness for mechanical applications
ISOVAL® TU 21/FR4	Round rolled epoxy glass fabric tube with high strength for mechanical and electrical applications
ISOVAL® TU 22	Round rolled epoxy glass fabric tube with high strength even at elevated temperature for mechanical and electrical applications

Addresses

Headquarters

Isovolta AG
2355 Wiener Neudorf
Austria

Phone: +43 5 9595-0
Fax: +43 5 9595-9050
headquarters@isovolta.com

ISOVOLTA Group production and distribution sites

Isovolta AG
Werndorf competence centre
8402 Werndorf
Austria
competence-centre@isovolta.com

Isovolta AG
Wiener Neudorf site
2355 Wiener Neudorf
Austria
info@isovolta.com

Isovolta AG
Lebring plant
8403 Lebring
Austria
info@isovolta.com

Isovolta Gatex GmbH
South plant
92442 Wackersdorf
Germany
info@isovolta.de

Isovolta Gatex GmbH
West plant
50181 Bedburg
Germany
info@isovolta.de

Isovolta Vertriebs GmbH
92442 Wackersdorf
Germany
info@isovolta.de

Isovolta S.A.
032982 Bucharest
Romania
info@isovolta.ro

Isovolta France SAS
75018 Paris
France
info@isovolta.fr

Isovolta France SAS
D.U.T.C. plant
25600 Brognard
France
info@isovolta.fr

Isovolta France SAS
D.I.U.A. plant
45120 Chalette sur Loing
France
info@isovolta.fr

Isovolta S.A.U.
08210 Barcelona
Spain
info@isovolta.es

Isovolta de Mexico S.A. de C.V.
54730 Mexico City
Mexico
info@isovolta.com.mx

Isovolta Inc.
Rutland, VT 05702-0848
USA
info@isovolta-vt.us

Isovolta Inc.
Harrisburg, OR 97446
USA
info@isovolta-or.us

Nippon Rika Isovolta Co Ltd.
Tochigi 321-0214
Japan
info@isovolta.jp

**Changzhou Isovolta
Electrical Insulation Materials Ltd.**
213002 Changzhou
China
info@isovolta.com.cn

**Changzhou Olong
Electrical Insulation Materials Co. Ltd.**
213002 Changzhou
China
info@isovolta.com.cn

**Changzhou Isovolta
Technical Composite Co. Ltd.**
213023 Changzhou
China
info@isovolta.com.cn

Isovolta ASIA Ltd.
Hong Kong
China
info@isovolta.com.cn

Isovolta India Private Ltd.
400 086 Mumbai
India
info@isovolta.in



www.isovolta.com

Imprint

Publisher: ISOVOLTA Group

Fotography: Riedmann, Vienna

Printing: Grasl Druck & Neue Medien, Bad Vöslau

© 2009/01 ISOVOLTA Group